

Sears

CRAFTSMAN® 1977-78

...WHERE AMERICA SHOPS

POWER AND HAND TOOL CATALOG

AN OUTSTANDING VALUE for this complete 9-inch Table Saw Outfit

Includes motorized saw,
2 extensions
and steel legs

\$159⁹⁵

CUTTING BLADE, CAPACITIES: 9-inch combination blade cuts wood up to 2 inches thick at 90°, 1 7/8 inches thick when tilted to 45°. Blade and motor tilt for bevel cuts. Bevel scale shows degree of blade tilt, has positive stops at 90° and 45°. Aluminum miter gauge slides in grooves on either side of blade. Table surface in front of blade at 1-inch cutting depth is 11 1/2 inches. Easy-to-align, lift-off rip fence locks front and rear with one knob . . . can be conveniently lifted off and replaced at any point. Rip fence positions on either side of blade for rips up to 14 1/2 inches wide on left side, up to 13 1/2 inches wide on right side. See-thru blade guard stays in raised position for ease of blade changing. Spreader helps minimize blade binding. Anti-kickback pawls help reduce chance of wood kicking back.

TABLE: Solid cast-aluminum table for accurate cutting results. Measures 17x20 inches overall.

EXTENSIONS: Two 10x20-inch formed steel extensions provide additional work surface . . . give you a total work area of 37x20 in. Attach to sides of saw, hardware included.

LEGS: Steel legs provide sturdy support. Rubber-padded leveling feet adjust to uneven or sloping floors and resist creeping. Attach to saw base with hardware included.

MOTOR: Built-in 3/4-HP motor develops 1.6 HP. Blade mounts to motor shaft so there is no power loss by transmission. Capacitor-start, induction-run, no motor brushes to repair or replace . . . causes no television interference like saws with universal motors. Requires little maintenance. Permanently lubricated ball bearings. 3450 rpm.

ELECTRICAL INFORMATION: Pull-on/push-off power switch with removable locking key. Runs on 120-volt, 60-Hertz AC. 1050 full-load input watts. With 6-foot, 3-wire cord. UL listed.

ORDERING INFORMATION: See Warranty on pg. 5. Order safety goggles on pg. 75, caster set on pg. 22.
9 HT 24 192N—Shipping weight 92 lbs. . . \$ 159.95



INDEX ON PAGE 83

Last date to order from this catalog is July 25, 1978

SEARS, ROEBUCK AND CO.

Satisfaction Guaranteed or Your Money Back



Please mention the key-letter at left when ordering by phone from this catalog



TO ORDER CALL SEARS

CUPERTINO, CA
996-1600
TO CHECK ON ORDER CALL
255-0222


SEARS CREDIT CARD

WRITE YOUR ACCOUNT NUMBER ABOVE

New at Sears

CRAFTSMAN® Portable Work Center

It's a workbench, a sawhorse, and a vise rolled into one compact package — folds flat for easy storage and carrying

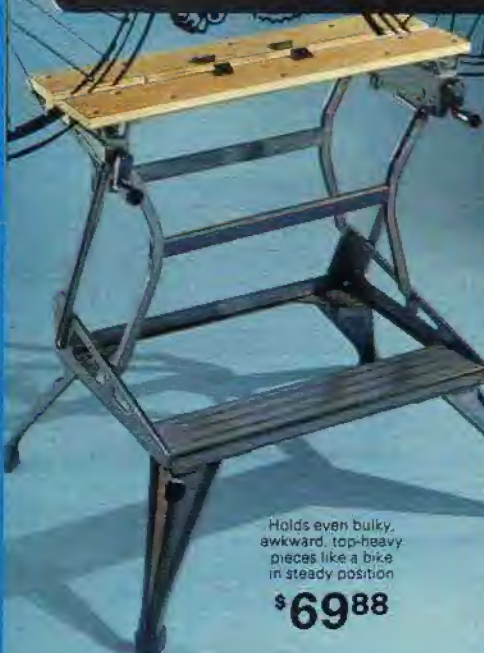

Holds even bulky, awkward, top-heavy pieces like a bike in steady position

\$6988

Swivel pegs hold irregular or circular-shaped pieces tightly in place



Double adjustment levers let you hold wedge-shaped pieces



Folds to suitcase-size—hang on a wall or even in a closet



Our new workbench is completely portable. Perfect for apartment dwellers and other home craftsmen with limited space. Folds flat for storage, but it's so useful and convenient, you may want to leave it set up all the time . . . it's that handy. Made in Canada.

TOP FRAME: Pressed flakeboard top. Steel frame. Base level step can be used as a footrest for added stability.

WISE: Vise jaws open to 5 inches wide. Double-adjustment levers permit gripping of wedge-shaped pieces. Swivel pegs hold irregular or circular-shaped pieces like pipe secure . . . even in a vertical position (see view above).

DIMENSIONS, CAPACITY: 31 1/4 inches high. Folds away to 29 1/2 x 29 x 7 1/4 inches high. Work table is 15 1/4 inches wide with vise open, 9 3/4 inches wide with vise closed. Maximum capacity: work parallel to two swivel grips, 12 inches; work diagonal to two swivel grips, 28 inches. Height of work surface is 31 3/4 inches with legs open, 23 1/8 inches with legs closed. Lightweight and easy-to-carry . . . weighs only 32 pounds. Supports maximum of 350 pounds.

ORDERING INFORMATION: See "N" suffix note on page 82.

9 HT 28876N—Shipping weight 37 pounds \$69 88



Planing, chiseling, and shaping in side vise

Carving . . . top resists warping from uneven stress

CRAFTSMAN® Woodworker's Bench

Has extra-long 78 1/2-inch clamping capacity

Legs, braces, and top of solid kiln-dried selected maple . . . steel vise handles **\$27995**

CONSTRUCTION: Solid maple table, legs, crosspieces. Steel vise handles, screws, guide rods. 37x75x33-in. high overall.

WORK SURFACE: 15 1/2 x 70-in. long. 4 dogs hold two 15 1/2-in. long maple clamping bars in place. Dogs fit into 14 pairs of holes 4 1/2-in. apart on table top, vise. Clamping cap. 78 1/2-in.

END VISE: Reinforced solid maple jaws, 10 1/2-in. vise capacity, 3x5 1/2-inch face. Complete with two guide rods.

SIDE VISE: Maple shoulder design secures workpieces for chiseling, carving, planing and sanding. 5 3/4-in. capacity.

TOOL TRAY: Maple, 34x8 1/2 x 2-in. deep. Mounts on side, end.

2 DRAWERS: Maple, pressboard bottom. 14x3 1/2 x 9 1/2-in. wide.

LEGS: Solid maple. Trestle style with crossbraces. Side-vise end has legs with four supports for lateral stability.

ORDER INFO: Partially assembled. See shipping note below. T9 HT 10231N—Shipping weight 175 pounds \$279 95

Workbench Stool with back (not shown). 16-gauge steel frame and back 37-in. high. Pressboard seat 26-in. high. Gray.

ORDER INFO: If mailed, takes 15-lb. rate, see page 82. 9 HT 10286L—Shipping weight 14 pounds \$24 50

SHIPPING NOTE: "T" items (as T9 HT 10231N) sent by motor carrier from Chicago, Philadelphia, Atlanta, Dallas, or Los Angeles. Pay shipping charges from your Distribution Center. Allow extra time. C.O.D.'s accepted only for shipment to a Sears store.

On-the-Site Construction Tool Shed

Gives you security at night—everybody on the crew can leave his tools in the roomy 47 1/2 x 30 x 60-inch wide vault overnight. Its special 2-lock system makes it tough to break into and it's too heavy to be easily carted away

New at Sears **\$22999**

VAULT: Heavy-duty 16-gauge steel construction throughout. Formed channel stiffening ribs for horizontal reinforcement of sides. Rain gutter around top helps prevent leakage and provides safety stop for open cover. Smooth, rounded edges keep weather outside. Arc-welded seams.

LOCKING COVER: 16-gauge steel. Two different built-in removable padlocks (2 keys each) . . . special locking system holds tight to protect against forced entry. Full cover protects against leakage and vandalism—opens up for easy access to contents.

HANDLES: Bar handles on ends for firm grip . . . maximum leverage. Handles stand out when in use, lay down when not in use. Twin handles on cover for easy raising, lowering.

SHELVES: Two 16-gauge steel shelves. Bottom shelf can be folded back out of the way, for additional space.

SKIDS: Steel skids on bottom offer protection, allow easy placement by lift truck.

ORDER INFO: Pay motor carrier charges from factory in Pochontas, Ar allow time; no C.O.D.'s. Assembled. F9 HT 65241N—Shipping weight 278 pounds . . . \$229 99



During the day use pull-down door as desk top on job site

Dry Chemical Fire Extinguishers Effective on all 3 fire classes



Class A fires. Burning paper, wood, fabric where water or multi-purpose dry chemical is most effective agent.

Class B fires. Burning flammable liquids (gasoline, oil, paint). Smothering is required.

Class C fires. In electrical equipment. Extinguishing agent must be non-conductor of electricity.

The higher the rating, the more effective on class of fire.

(1 thru 4) UL listed. Meet requirements of Occupational Safety and Health Act (OSHA), Marine Testing Inst., Factory Mutual Research Corporation.

CONSTR.: Professionally refillable. Red epoxy-finished aluminum container, pressure gauge. Pull-pin helps prevent accidental discharge. Rustproof plastic wall hanger.

EXTINGUISHING AGENT: Mono-ammonium phosphate dry-chemical charge. Non-toxic.

(1) **1-A; 10-B;C Extinguisher.** 17x3-inch diameter. Effective on medium-sized fires of all classes.

RANGE: 12 feet for approximately 10 seconds.

ORDER INFO: See fire class info. above, warranty p. 84. 9 HT 5804—Shipping weight 4 lbs. 8 oz. \$12 99

(2) **2-A; 40-B;C Extinguisher.** 19x4 1/2-inch diameter. Four times as effective as (1) on B, C fires; twice as effective on A fires.

RANGE: 18 feet for approximately 10 seconds.

ORDER INFO: See fire class info. above, warranty p. 84. 9 HT 5805—Shipping weight 9 pounds \$22 99

(3) **4-A; 60-B;C Extinguisher.** 20x5-in. diameter. Six times as effective as (1) on B, C fires; 4 times as effective on A fires.

RANGE: 12 to 20 feet for approximately 10 seconds.

ORDER INFO: See fire class info. above, warranty p. 84. 9 HT 5801C—Shipping weight 19 pounds \$34 95

(4) **10-A; 80-B;C Extinguisher.** 23x7-inch diameter. Eight times as effective as (1) on B, C fires; 10 times as effective on A fires.

RANGE: 12 to 20 feet for approximately 10 seconds.

ORDER INFO: See fire class info. above, warranty p. 84. 9 HT 5809C—Shipping weight 37 pounds \$49 95